

## Twilight switch MROK-16SW

### Description

The MROK-16SW twilight switch is a set consisting of a control module and an SW-10 cylindrical probe. The device is used for automatic lighting control – most often switching on at dusk and off at dawn. It is also used to control street lighting, advertising signs, shop windows, and other facilities.

The control module is mounted on a TH35 rail (IP20 housing), while the installer should mount the SW-10 cylindrical probe in a weather-resistant enclosure, e.g., IP65. The activation threshold is adjusted using a knob located on the control module, ranging from approximately 2 to 50 lux, and the response delay is 10–20 s, eliminating the impact of short-duration light pulses. The maximum load current is 16 A 250 V AC AC-1 (2.5 A 250 V AC AC-15).



### Principle of operation

The device monitors light intensity and turns the lighting circuit on when it drops below the set threshold (dusk) and off when it rises (dawn). The activation threshold is adjusted using a knob located on the control module. During adjustment, a red LED indicates when the correct setting has been reached. Changing the activation threshold causes a proportional shift in the deactivation threshold, ensuring stable hysteresis. Switching on and off occurs with a 10–20-second delay, preventing accidental switching due to brief lighting changes.

### Load selection

- 1 category covers resistive loads, meaning those that do not generate significant inrush currents or have inductive properties. The situation is different for LED sources – each LED system contains a power supply, which can be built into the light source (e.g., an E27 LED bulb) or externally. When the power supply is turned on, the input capacitors charge, resulting in a very high, short-term surge current. In extreme cases, this current can reach values tens or even hundreds of times greater than the rated current – a phenomenon most often encountered in simple, inexpensive LED power supplies such as "cheap drivers." For example, a single 20W LED luminaire can experience a surge of 40-70A lasting 1-2 ms, which, despite the luminaire's seemingly low power output, can fuse relay contacts.

Why don't we provide a table for selecting LED load for Pollin products?

The load generated by an LED depends on the internal design of the power supply and cannot be precisely estimated without detailed data from the power supply manufacturer. Commercially available designs vary significantly, making it impossible to determine a clear value, allowing only estimates with a greater or lesser margin of error. Therefore, special care must be taken when selecting contactors and relays for LED loads.

### Suggestion for the installer

Use a reduction factor – **connect 5 to 10 times fewer luminaires to the contact than their rated power, and in the case of cheap LED sources even 15 to 30 times less** .

In larger installations, choose contactors or relays with a higher load capacity, preferably with a "zero-crossing" function, which can significantly reduce the effects of surge currents.


### Technical data

| Parameter name              | Value                             |
|-----------------------------|-----------------------------------|
| Rated supply voltage        | 230V AC                           |
| Operating temperature range | -25 to 50 °C                      |
| Max power consumption       | 5.5 VA                            |
| Number of relay outputs     | 1                                 |
| Contact arrangement         | Voltage output                    |
| Maximum load current AC-1   | 16A / 250V AC                     |
| Maximum load current AC-15  | 2.5A / 250V AC                    |
| Maximum LED load power      | 120 W                             |
| Trigger threshold           | Adjustable<br>approx. 2 to 50 Lux |
| Hysteresis                  | 10 to 20 Lux                      |
| Delay in operation          | 10 to 20 seconds                  |

| Parameter name                                              | Value                                        |
|-------------------------------------------------------------|----------------------------------------------|
| Case                                                        | Modular housing<br>(1 DIN module)            |
| Degree of protection                                        | IP20                                         |
| Installation                                                | TH35 rail                                    |
| Light sensor (photoelement)                                 | Phototransistor (SW-10<br>cylindrical probe) |
| Threshold signaling                                         | Red LED working<br>instantly                 |
| Clamp type                                                  | Elevator                                     |
| Wire stripping length                                       | 8 mm                                         |
| Single-wire conductor                                       | 0.5 to 2.5 mm <sup>2</sup>                   |
| Multi-stranded conductor (stranded<br>wire) without ferrule | 0.5 to 2.5 mm <sup>2</sup>                   |
| Stranded wire with square crimp<br>sleeve                   | 0.5 to 2.5 mm <sup>2</sup>                   |
| Tighten to maximum torque                                   | 0.5 Nm                                       |

Full technical specifications are available on the website [www.pollin.pl/do-pobrania](http://www.pollin.pl/do-pobrania) or by scanning the QR code provided in the warranty and guarantee section.

### Connection diagram

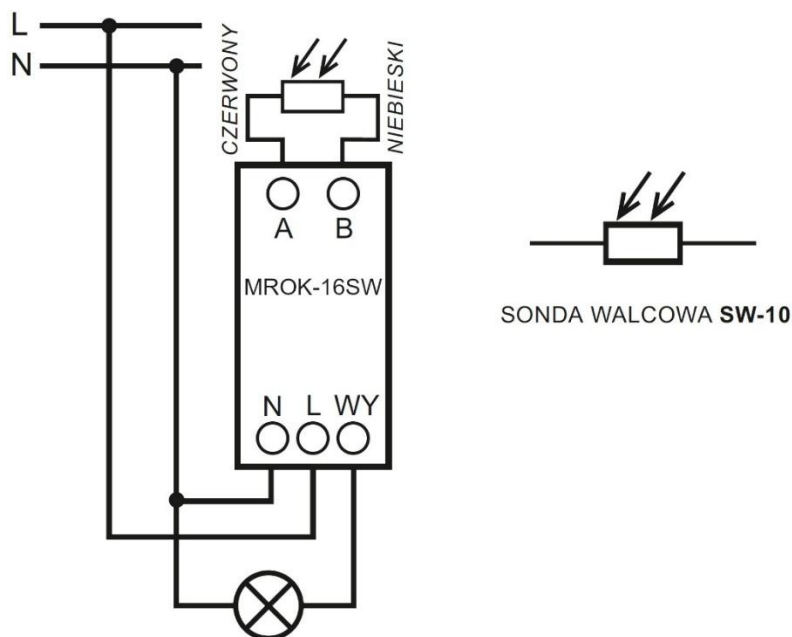

## Installation

The MROK-16SW twilight switch must be installed in accordance with applicable standards and regulations for electrical installations. The following guidelines are intended to ensure the installer's safety and the proper operation of the device:

1. **Authorizations** - The device may only be installed by a person with appropriate qualifications and authorizations to work on electrical installations.
2. **Disconnecting the power supply** - Before starting any work, it is essential to disconnect the power supply at the distribution board and make sure that the circuit is voltage-free (e.g. using a voltage indicator).
3. **Personal Protection** - The installer should use personal protective equipment such as electrically insulating gloves and safety glasses.
4. **Mechanical installation** – The MROK-16SW twilight switch should be mounted on a standard TH35 rail in the distribution board, ensuring a stable fit and adequate ventilation. The SW-10 light sensor is designed for mounting in a 10.5 mm diameter hole. It should be mounted perpendicular to, for example, the building's facade and in a location that is not illuminated by the connected light source or other lighting (except in situations where the user wishes to detect artificial lighting).
5. **Connecting Wires** - Connections should be made according to the wiring diagram provided by the manufacturer. Ensure that terminals are tightened with the correct torque and that wires of the appropriate cross-section are used. Only one wire may be inserted into each terminal – regardless of whether it is solid or stranded with a crimped ferrule.
6. **Checking the connections** - After completing the installation, carefully check the correctness of all connections, make sure that the terminals are securely tightened and that there are no exposed wires that could cause a short circuit or a shock hazard.
7. **Restoring Power** - After completing the installation and inspection, turn on the power and check the operation of the device according to the instructions.
8. **Testing** - After assembly, verify the device's proper operation. To verify its operation, cover the entire device tightly, for example, with a cardboard box or a dark, thick cloth. Covering only the probe's "eye," for example, with a finger, is insufficient, as sunlight is very intense and penetrates the photoelement through the plastic housing and human skin.

**No Modifications** - Any modifications to the device or its components are prohibited. This may result in malfunctions and a safety hazard.

## Warranty and guarantee – short information

**The warranty** applies to every purchaser, including consumers. Warranty claims should be directed to the seller from whom the purchase was made.

If a defect is found in the device, the customer has the right to choose: he or she can use the statutory warranty (in accordance with the provisions of the Civil Code) or the manufacturer's warranty.



### Pollin Guarantee



Pollin devices are covered by a 10-year manufacturer's warranty – Zakład Elektroniczny POLLIN Wojciech Polak. The warranty applies only to devices purchased by businesses and covers material and manufacturing defects.

Warranty claims should be submitted by e-mail to: [pollin@pollin.pl](mailto:pollin@pollin.pl), in accordance with the procedure described in the full version of the document.

The warranty does not cover, among other things, mechanical damage, unauthorized modifications, installation by unqualified persons and natural wear and tear of consumables.

The full text of the warranty terms is available at: <https://pollin.pl/do-pobrania> or via the attached QR code.

## Markings



This symbol on a device indicates that the used equipment should not be disposed of with other household waste. Used equipment should be taken to one of the designated electronic waste collection points or returned to the store when purchasing new equipment. Improper disposal of electronic waste poses a threat to the environment and human health.



The CE marking confirms that the product meets the essential requirements of all applicable European Union directives and regulations.



This marking indicates that installation, connection and all servicing of the device may only be performed by qualified personnel with electrical qualifications.

## Technical support – the fastest help from Pollin experts

If you have any questions regarding the operation, configuration or installation of the device, **please contact us by email – this is the fastest way to obtain technical support**.

Send a message to: [support@pollin.pl](mailto:support@pollin.pl), describe the problem in detail and leave your contact number and the hours when we can call you.

Our engineers will review your request and make every effort to provide you with professional assistance as quickly as possible.



Pollin Automation – Technology That Works for You

### Want to talk to the sales department?

Use the telephone contact – the number can be found at <https://pollin.pl/>.

### Discover the world of Pollin automation – more than one product!

Thank you for your trust and for choosing Pollin technology – solutions that work for you. This is just the beginning of the possibilities Pollin technology offers! Our brand is synonymous with reliability, innovation, and safety in electrical installations.

On the website <https://www.pollin.pl> you will find:

- **A full product catalog** – from automation and security to modern solutions supporting renewable energy sources and Smart Home installations.
- **Downloadable materials** – manuals, diagrams, catalog cards and warranty documents in one place.

Don't wait – scan the QR code from the manual or visit our website and discover solutions that are changing industry standards.

**Pollin is more than just a product**  
It is a trusted partner in your work !