


## Modular lamp (three-phase voltage indicator) WN-3FG-P

### Description

The WN-3FG-P is a three-phase modular lamp (voltage indicator) equipped with a monostable button that allows for momentary checking of the presence of voltage in the three-phase network. The LEDs illuminate only when the button is pressed, allowing for quick and safe testing of the installation's status.

Each phase is assigned one LED: L1, L2, L3. In the WN-3FG-P model, all LEDs are green, ensuring clear readings.

The modular housing (1 DIN module) is made of self-extinguishing plastic and is designed for mounting on a TH35 rail.

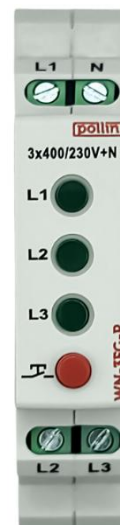

### Principle of operation

- After pressing the button, the LEDs indicate the presence of voltage on individual phases.
- If the LED corresponding to a given phase does not light up despite pressing the button, this means there is no voltage on that phase.
- At reduced voltage, the LED emits less light, maintaining visibility at least up to 24V AC. Further voltage drops cause the LED to dim and turn off.

### Energy efficiency

The WN-3FG-P voltage indicator is particularly recommended for installations where attention is paid to **reducing electricity consumption**.

Thanks to the use of a monostable button, the lamp only draws energy when the person operating it holds the button pressed, which practically eliminates unnecessary power consumption.

The lamp consumes 0.25 W during operation (lighting), which means that if it were on all year round (24 hours a day), it would consume approximately 2.19 kWh of electricity.

### What does "monostable" mean?

A monostable button returns to its rest position when released. This means the indicator only works while the button is held down – once released, the LEDs turn off.


### Technical data

| Parameter name              | Value                                |
|-----------------------------|--------------------------------------|
| Rated supply voltage        | 3 x 400 / 230 V AC + N               |
| Operating temperature range | -20 to 50 °C                         |
| Max power consumption       | 0.3 VA (after activating the button) |
| Max. dissipated power       | 0.25 W (after activating the button) |
| Case                        | Modular housing (1 DIN module)       |
| Degree of protection        | IP20                                 |
| Installation                | TH35 rail                            |

| Parameter name                                           | Value                      |
|----------------------------------------------------------|----------------------------|
| Clamp type                                               | Screw with washer          |
| Wire stripping length                                    | 6 mm                       |
| Single-wire conductor                                    | 1.0 to 2.5 mm <sup>2</sup> |
| Multi-stranded conductor (stranded wire) without ferrule | 1.0 to 2.5 mm <sup>2</sup> |
| Stranded wire with square crimp sleeve                   | 1.0 to 1.5 mm <sup>2</sup> |
| A stranded wire with a trapezoidal crimp sleeve          | 0.5 to 2.5 mm <sup>2</sup> |
| Tighten to maximum torque                                | 0.5 Nm                     |

Full technical specifications are available on the website [www.pollin.pl/do-pobrania](http://www.pollin.pl/do-pobrania) or by scanning the QR code provided in the warranty and guarantee section.

## Connection diagram

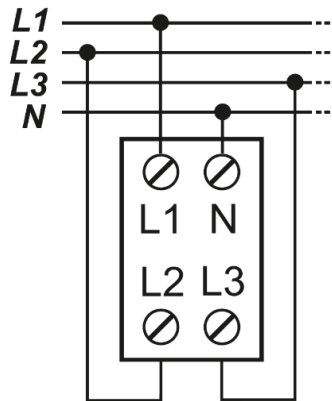

## Installation

The WN-3FG-P voltage indicator must be installed in accordance with applicable electrical installation standards and regulations. The following guidelines are intended to ensure the installer's safety and the proper operation of the device:

1. **Authorizations** - The device may only be installed by a person with appropriate qualifications and authorizations to work on electrical installations.
2. **Disconnecting the power supply** - Before starting any work, it is essential to disconnect the power supply at the distribution board and make sure that the circuit is voltage-free (e.g. using a voltage indicator).
3. **Personal Protection** - The installer should use personal protective equipment such as electrically insulating gloves and safety glasses.
4. **Mechanical installation** - The device should be mounted on a standard TH35 rail in the distribution board, ensuring stable mounting and adequate ventilation space.
5. **Connecting Wires** - Connections should be made according to the wiring diagram provided by the manufacturer. Ensure that terminals are tightened with the correct torque and that wires of the appropriate cross-section are used. Only one wire may be inserted into each terminal – regardless of whether it is solid or stranded with a crimped ferrule.
6. **Checking the connections** - After completing the installation, carefully check the correctness of all connections, make sure that the terminals are securely tightened and that there are no exposed wires that could cause a short circuit or a shock hazard.
7. **Restoring Power** - After completing the installation and inspection, turn on the power and check the operation of the device according to the instructions.
8. **Tests** - After completing the installation, check the correct operation of the device, e.g. all LEDs are lit.

**No Modifications** - Any modifications to the device or its components are prohibited. This may result in malfunctions and a safety hazard.

## Warranty and guarantee – short information

**The warranty** applies to every purchaser, including consumers. Warranty claims should be directed to the seller from whom the purchase was made.

If a defect is found in the device, the customer has the right to choose: he or she can use the statutory warranty (in accordance with the provisions of the Civil Code) or the manufacturer's warranty.



### Pollin Guarantee



Pollin devices are covered by a 10-year manufacturer's warranty – Zakład Elektroniczny POLLIN Wojciech Polak. The warranty applies only to devices purchased by businesses and covers material and manufacturing defects.

Warranty claims should be submitted by e-mail to: [pollin@pollin.pl](mailto:pollin@pollin.pl), in accordance with the procedure described in the full version of the document.

The warranty does not cover, among other things, mechanical damage, unauthorized modifications, installation by unqualified persons and natural wear and tear of consumables.

The full text of the warranty terms is available at: <https://pollin.pl/do-pobrania> or via the attached QR code.

## Markings



This symbol on a device indicates that the used equipment should not be disposed of with other household waste. Used equipment should be taken to one of the designated electronic waste collection points or returned to the store when purchasing new equipment. Improper disposal of electronic waste poses a threat to the environment and human health.



The CE marking confirms that the product meets the essential requirements of all applicable European Union directives and regulations.



This marking indicates that installation, connection and all servicing of the device may only be performed by qualified personnel with electrical qualifications.

## Technical support – the fastest help from Pollin experts

If you have any questions regarding the operation, configuration or installation of the device, **please contact us by email – this is the fastest way to obtain technical support**.

Send a message to: [support@pollin.pl](mailto:support@pollin.pl), describe the problem in detail and leave your contact number and the hours when we can call you.

Our engineers will review your request and make every effort to provide you with professional assistance as quickly as possible.



Pollin Automation – Technology That Works for You

### Want to talk to the sales department?

Use the telephone contact – the number can be found at <https://pollin.pl/>.

### Discover the world of Pollin automation – more than one product!

Thank you for your trust and for choosing Pollin technology – solutions that work for you. This is just the beginning of the possibilities Pollin technology offers! Our brand is synonymous with reliability, innovation, and safety in electrical installations.

On the website <https://www.pollin.pl> you will find:

- **A full product catalog** – from automation and security to modern solutions supporting renewable energy sources and Smart Home installations.
- **Downloadable materials** – manuals, diagrams, catalog cards and warranty documents in one place.

Don't wait – scan the QR code from the manual or visit our website and discover solutions that are changing industry standards.

**Pollin is more than just a product**  
It is a trusted partner in your work !